



410 Rec'd PCT/PTO 10 SEP 2001

PCT

FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE TRANSMITTED TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER: 98EP01 US U.S. PCT NO. (US) 98/0936261
INTERNATIONAL APPLICATION NO.: PCT/EP00/00789	INTERNATIONAL FILING DATE: 8 MARCH 2000	PRIORITY DATE CLAIMED: 8 MARCH 1999
TITLE OF INVENTION: ELECTRICAL COIL MODULE, AN ELECTRICAL COIL COMPRISING SUCH MODULES, AN ACTUATION MECHANISM INCLUDING SUCH A COIL AND A CIRCUIT BREAKER COMPRISING SUCH AN ACTUATION MECHANISM		
APPLICANT(S) FOR DO/EO/US: Jean-Marc MEYER, Henri DUFFOUR and Serge MARTIN		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1. <input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.	
2. <input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.	
3. <input checked="" type="checkbox"/>	This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).	
4. <input checked="" type="checkbox"/>	A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.	
5. <input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371(c)(2))	
6. <input checked="" type="checkbox"/>	a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).	
7. <input type="checkbox"/>	b. <input type="checkbox"/> has been transmitted by the International Bureau. (see attached copy of PCT/IB/308)	
8. <input type="checkbox"/>	c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).	
9. <input type="checkbox"/>	A translation of the International Application into English (35 U.S.C. 371(c)(2)).	
10. <input type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).	
11. <input type="checkbox"/>	a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).	
12. <input type="checkbox"/>	b. <input type="checkbox"/> have been transmitted by the International Bureau.	
13. <input type="checkbox"/>	c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.	
14. <input type="checkbox"/>	d. <input type="checkbox"/> have not been made and will not be made.	
15. <input type="checkbox"/>	A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).	
16. <input type="checkbox"/>	An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).	
17. <input type="checkbox"/>	A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).	
Item 11. to 16. below concern document(s) or information included:		
18. <input type="checkbox"/>	An Information Disclosure Statement under 37 CFR 1.97 and 1.98.	
19. <input type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.	
20. <input checked="" type="checkbox"/>	A FIRST preliminary amendment.	
21. <input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.	
22. <input type="checkbox"/>	A substitute specification.	
23. <input type="checkbox"/>	A change of power of attorney and/or address letter.	
24. <input checked="" type="checkbox"/>	Other items or information:	
INTERNATIONAL PRELIMINARY EXAMINATION REPORT, INTERNATIONAL SEARCH REPORT, ABSTRACT APPLICATION DATA SHEET		

U.S. APPLICATION NO. 09/936261

INTERNATIONAL APPLICATION NO.
PCT/SE00/00789ATTORNEY'S DOCKET NO.
98EP01 US17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):**

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$ 1,000.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$ 860.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$ 710.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$ 690.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	10 - 20 =	0	X \$18.00	\$
Independent claims	1 - 3 =	0	X \$80.00	\$
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270.00	\$

TOTAL OF ABOVE CALCULATIONS =

\$ 990.00

Reduction of 1/2, if applicant is entitled to Small Entity status under 37 CFR 1.27.

+

\$

SUBTOTAL =

\$ 990.00

Processing fee of \$130 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.49(f)).

\$

TOTAL NATIONAL FEE =

\$ 990.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

\$

TOTAL FEES ENCLOSED =

\$ 990.00

Amount to be
refunded:

charged:

- a. ☒ A check in the amount of \$ 990.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. **25-0120** in the amount of \$ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required by 37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. **25-0120**. A duplicate copy of this sheet is enclosed.

SEND ALL CORRESPONDENCE TO:

CUSTOMER NO. 00466
YOUNG & THOMPSON
 745 South 23rd Street
 2nd Floor
 Arlington, VA 22202
 (703) 521-2297
 facsimile (703) 685-0573

September 10, 2001

By

Benoît Castel
 Benoît Castel
 Attorney for Applicants
 Registration No. 35,041

09/936261

JC03 Rec'd PCT/CTO

10 SEP 2001

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Jean-Marc MEYER et al.

Box PCT

Serial No. (unknown)
(PCT/SE00/00789)

Application Branch

Filed herewith

ELECTRICAL COIL MODULE,
AN ELECTRICAL COIL
COMPRISING SUCH MODULES,
AN ACTUATION MECHANISM
INCLUDING SUCH A COIL AND
A CIRCUIT BREAKER COMPRISING
SUCH AN ACTUATION MECHANISM

PRELIMINARY AMENDMENT

Commissioner for Patents

Washington, D.C. 20231

Sir:

Prior to the first Official Action and calculation
of the filing fee, please amend the above-identified applica-
tion as follows:

IN THE CLAIMS:

Amend claim 3 as follows:

--3. (Amended) An electrical coil comprising at
least two coil modules according to claim 1 characterised in
that, modules are superimposed and clamped together to create
a flat coil in which the respective coil modules are electri-
cally connected in parallel.--

Amend claim 5 as follows:

0936261.12601

--5. (Amended) An electrical coil according to claim 2, characterised in that, it comprises at least one pair of modules said modules are superimposed without intermediate isolation element.--

Amend claim 6 as follows:

--6. (Amended) An actuation mechanism of the Thompson type comprising an energising coil (7), a co-operating disk (8) and a shaft (10) transferring the movement of the disk (8) characterised in that said coil is of the type defined in claim 3.--

Amend claim 9 as follows:

--9. (Amended) A hybrid circuit breaker comprising an electromechanical circuit breaker according to claim 7 and a static circuit breaker connected in parallel characterised in that said static circuit breaker comprises a diode bridge (D1-D4) connected in parallel over the mechanical contacts (4, 5) of the electromechanical circuit breaker the diagonal of which bridges is including at least one IGCT type thyristor (T1, T2) connected in parallel with a MOV (6).--

R E M A R K S


The above changes in the claims merely place this national stage application in the same condition as it was during Chapter II of the international stage, with the multiple dependencies being removed.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "VERSION WITH MARKINGS TO SHOW CHANGES MADE."

Respectfully submitted,

YOUNG & THOMPSON

By


Benoit Castel
Attorney for Applicants
Registration No. 35,041
Customer No. 00466
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

September 10, 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

Amend claim 3 as follows:

--3. (Amended) An electrical coil comprising at least two coil modules according to claim 1 ~~or 2~~ characterised in that, modules are superimposed and clamped together to create a flat coil in which the respective coil modules are electrically connected in parallel.--

Amend claim 5 as follows:

--5. (Amended) An electrical coil according to claim 2 ~~and 3~~, characterised in that, it comprises at least one pair of modules ~~according to claim 2~~ said modules are superimposed without intermediate isolation element.--

Amend claim 6 as follows:

--6. (Amended) An actuation mechanism of the Thompson type comprising an energising coil (7), a co-operating disk (8) and a shaft (10) transferring the movement of the disk (8) characterised in that said coil is of the type defined in ~~any of the claims~~ claim 3 to 5.--

Amend claim 9 as follows:

--9. (Amended) A hybrid circuit breaker comprising an electromechanical circuit breaker according to claim 7 ~~or 8~~ and a static circuit breaker connected in parallel characterised in that said static circuit breaker comprises a diode bridge (D1-D4) connected in parallel over the mechanical

contacts (4, 5) of the electromechanical circuit breaker the diagonal of which bridges is including at least one IGCT type thyristor (T1, T2) connected in parallel with a MOV (6).--

09030251.122601

5/18/15

AN ELECTRICAL COIL MODULE, AN ELECTRICAL COIL COMPRISING SUCH MODULES, AN ACTUATION MECHANISM INCLUDING SUCH A COIL AND A CIRCUIT BREAKER COMPRISING SUCH AN ACTUATION MECHANISM.

5

Technical field

This invention relates to an electrical coil module, an electrical coil comprising such modules, an actuation mechanism including such a coil and a circuit breaker comprising such an actuation mechanism. The present actuation mechanism is preferably used in circuit breakers especially for protection of DC installations such as traction networks including the rail vehicles. The circuit breaker is typically used for limiting current in case of short circuit somewhere in the installation. It has, however, also numerous other industrial applications.

15

A hybrid breaker stands for a circuit breaker making use of the successive action of a very fast mechanical system and a static circuit breaker.

Background art

20

It is possible to distinguish three different categories of circuit breakers for DC.

The electromechanical circuit breaker, the static circuit breaker and the hybrid circuit breaker.

25

The first type of circuit breaker, the electromechanical circuit breaker, is today used in most of the feeding stations and rail vehicles in traction systems.

This type has, however, several inconveniences such as high wear, high noise level, a relatively long reaction time, high maintenance costs, etc..

30

CONFIRMATION COPY

WO 00/54292

PCT/EP00/00789

The static circuit breaker has been the object of numerous tests, studies and realisations on a laboratory scale but the high dissipation during normal operation makes it unusable for commercial exploitation.

5

The last type of circuit breaker, the hybrid breaker, has its name from the combination of an electromechanical system and power electronics. During normal working conditions the current is conducted through a mechanical connector having very low losses. When activated the mechanical connector disconnects and the current is taken over by a static breaker connected in parallel. Once the mechanical connector has completely disconnected the static part is breaking the current through the circuit. Due to the fast operation of the mechanical system and the commutation of the current the arc created over the mechanical contacts is limited.

15

Several different realisations are possible. One known solution uses the injection of current in the opposite direction of the short circuit current by means of the discharge of a capacitor. This type has been the object of numerous tests and realisations. Its complexity, price and lack of reliability have, however, prevented its commercial success.

20

Brief description of the invention

One object of the present invention is to provide an electrical coil module of planar type preferably manufactured by means of printed circuit techniques on a generally flat substrate.

25

It is a further object of the invention to provide an extremely thin and compact electrical coil making use of such coil modules which is especially advantageous

as a driving means in a so called Thomson mechanism forming part of a circuit breaker. This type of coil has also other applications.

A further object of the present invention is to provide a circuit breaker of the hybrid type which is extremely fast and efficient.

An advantageous embodiment of the circuit breaker is characterised by a new design of the electromechanical actuation mechanism and an especially compact and symmetrical design of the static part of the breaker.

An important advantage with the circuit breaker according to the invention is that the dissipation is extremely low. The noise level when actuated is also very low. The new design of the actuation mechanism for the mechanical contact has increased the speed of the mechanism and made it very compact. Reliability and life time of the breaker are excellent.

Brief description of the figures

Other objects, uses and advantages of this invention will be apparent from the reading of this description which proceeds with reference to the accompanying drawings forming part thereof and wherein:

figure 1 schematically shows a hybrid circuit breaker according to the present invention,

figure 2 schematically shows the electromechanical part of the circuit breaker,

figure 3a and 3b show different views of a coil module of planar type forming part of a first embodiment of the coil in the drive mechanism of the electromechanical part of the circuit breaker,

WO 00/54292

PCT/EP00/00789

figure 3c shows an isolating element to be placed between two successive coil modules according to figures 3a and 3b,

- 5 figure 4a – 4d show different views of two coil modules of planar type forming part of a second embodiment of the coil in the drive mechanism of the electromechanical part of the circuit breaker,

- figure 5 shows the electrical and mechanical arrangement of the components of the static part of the circuit breaker,

figure 6 shows another electrical and mechanical arrangement of the components of the static part of the circuit breaker,

- 15 figure 7 shows a MOV – resistor combination efficient to reduce the cost of the MOV by distributing the energy.

figure 8 schematically shows the locking mechanism of the electromechanical part of the circuit breaker,

- 20 figure 9a and 9b show side views of the contact and drive mechanism of one embodiment of the invention.

Detailed description of the invention

- 25 Figure 1 shows schematically and in a general way a circuit breaker according to the present invention. A normally closed mechanical contact 1 in the main circuit 3 is carrying the current during normal conditions. The contact 1 comprises fixed contact elements 4 and a mobile contact element 5. A static circuit breaker,
- 30 generally designated 2 is connected in parallel to the contact 1. The current through the mechanical contact could flow in either direction at the moment

when the circuit breaker is activated. The static part is therefore symmetrical to be able to take over and break the current in case of e.g. a short circuit in the main circuit 3.

- 5 The static part 2 of the circuit breaker comprises a diode bridge D1-D4 making the breaker work for both directions of the current in the main circuit 3. The active part of the breaker comprises at least one thyristor of the type IGCT (Integrated Gate Commutated Thyristor). The described embodiment uses two IGCTs T1, T2 connected in parallel between which the current is partitioned.
- 10 This design and its components make it possible to break currents of the order of 6kA without the necessity of special precautions like help circuits for the commutation, static and dynamic balancing of the currents, matching the component etc.. This value of the current is of course not to be interpreted as a limitation in any direction. By means of an appropriate choice of the components
- 15 circuit breakers for higher as well as lower nominal current values can of course be designed according to the same principles. A MOV (Metal Oxide Varistor) 6 connected in parallel to the IGCTs is used to limit the voltage over the devices when the IGCTs are opening and to dissipate the inductive energy of the main circuit 3. Alternatively the MOV 6 connected in parallel with the IGCTs can be
- 20 combined with an additional parallel branch including a second MOV 6' having a resistor 25 in series in order to reduce the energy dissipated in the MOV 6. This arrangement is shown in figure 7. The MOV 6' must have a withstand-voltage value close to the feeder voltage.
- 25 In reality the mechanical contact 1 is controlled by means of a very fast actuating mechanism e.g. of the Thomson type. Figure 2 shows such a mechanism and the contact 1. The mechanism uses electrodynamic repulsion between two electrical currents circulating in the opposite directions in a coil 7 and a disk 8 to create the needed physical movement. Under normal conducting conditions the
- 30 contact 1 is secured by means of magnetic means 9. The mechanism also includes damping means for the mechanical movement (not shown) preferably

WO 00/54292

PCT/EP00/00789

arranged below the magnetic means 9. The mechanism will be further described below.

During normal operation the mechanical contact 1 is closed and the current in the main circuit 3 passes the contact without creating any excessive thermal effect.

A short circuit somewhere in the main circuit 3 could considerably increase the current over nominal values which could of course damage components and equipment in the circuit. In order to minimise the effect of such a short circuit it would therefore be of interest to completely break the current as quickly as possible.

Detection means (not shown) are arranged in the circuit to detect an increase of the current which could be due to e.g. a short circuit. Co-operating control means (not shown) sends a signal to the actuation means of the mechanical breaker. A signal is also sent to the gates of the thyristors T1, T2 to activate the same. If the contact element 5 at the breaking instant is opening symmetrically, i.e. if the element is creating two spark gaps at the same time, one at each end portion of the element 5, two sparks appear between the mobile contact element 5 and the fixed contact elements 4. The voltages related to these sparks which could be in the order of 2x20V allows the current to commutate to the static part 2 of the breaker relatively fast (in the order of 50 microseconds). The air in the two gaps is ionised due to the arcs which means that the dielectric properties of the gaps are deteriorating. As a consequence it will be necessary to wait until the air has de-ionised and cooled down before the IGBTs are turned off otherwise there is a risk that the high voltage (e.g. 3kV) will generate new arcs across the contact elements.

In the alternative the element 5 could be given a movement such that it opens unsymmetrically, i.e. to start with only one spark gap is created at the breaking

instant. Thus only one spark appears at one end portion of the element 5. The current will in this case commute slower (e.g. 100 microseconds). The advantage with this alternative is that the air will not be ionised at the end portion of the contact element 5 where no spark is created during the commutation and the overall dielectric properties will be much better which means that the delay before the IGBTs are turned off could be made much shorter. The energy dissipated in the volume of air between the contact elements 4, 5 is very low due to the fact that the current rapidly decreases. The high speed of the separation of the contact elements also favours the replacement of air in said volume which contributes to a good cooling. Additionally the evaporation of metal from the contact elements is negligible compared to the case with an electromechanical breaker.

The speed of the commutation is mainly dependent on the geometry of the connections of the static cell and the voltage over the conducting semiconductors.

The parallel connection of the two IGBTs T1, T2 requires a perfect symmetry in the geometry of the bus bars which leads to symmetrical stray inductances. The diodes D1, D2, D3, D4 and the IGBTs T1, T2 need a mounting which exercises mechanical pressure P1 and P2 on the components. If the pressure needed for the diodes P1 is different than that for the IGBTs, P2, the mechanical assembly can be arranged as represented in figure 5 with two separate stacks of components. If the same pressure P3 is required, the arrangement of figure 6 with one single stack can be adopted. In both figure 5 and figure 6, the current paths (and so the stray inductances) are exactly the same for the two IGBTs connected in parallel.

When the current has completely commutated to the semiconductors the breaker has to wait until the contacts are sufficiently separated before the static

WO 00/54292

PCT/EP00/00789

interruption is started. It is necessary that the isolation distance between the mechanical contact elements is sufficient to guarantee that no arcing reappears.

The interruption of the current in the respective IGCT is almost instantaneous.

- 5 The current is thus passing the MOV 6 and decreases rapidly. The time between the detection of a short circuit and the start of the decrease of the current is about 350 microseconds which is about 15 to 20 times as fast as for electromechanical breakers. The power semiconductors are typically capable of interrupting several thousands of amperes in a time less than two microseconds.
- 10 Taking this into account it is clear that in order to profit from this characteristic it is necessary to reduce the opening time for the mobile contact.

- In order to reduce the opening time for the contact 1 a system with electrodynamic propulsion is used as described above. The mechanical part of
- 15 the hybrid breaker comprises three distinct units, the mobile contact 5, the magnetic locking mechanism 9 and the actuator 7, 8, 10. The actuator giving the electrodynamic propulsion is in the described example of the previously known Thomson type.

- 20 Such an actuator is illustrated schematically in figures 2 and 9. The mobile contact 5 has in the illustrated embodiment of the invention been given a pivoting movement in order to reduce the displaced mass in the operation.

- An arrangement of the moving contact for pivoting movement is shown in figure
- 25 9. The moving contact 5 has been mounted on an arm 11 pivoting around a pin 12. The arm is preferably spring loaded by means springs 13 keeping the arm in contact with the end portion of the shaft 14 of the locking mechanism 9.

- In order to evacuate the heat produced at the contact elements 4, 5 the mass of
- 30 the fixed contact elements 4 have deliberately been chosen important. The magnetic locking mechanism 9 which is illustrated more in detail in figure 8

allows the closing and opening of the circuit breaker and the application of a constant force between the contact elements in the closed position in order to decrease the electrical resistance. The locking mechanism comprises an electromagnet 15 with a mobile iron core and a permanent magnet 16. The locking mechanism is closed by injecting a current in the coil 28 from an auxiliary DC source. This creates a magnetic flux in the iron circuit. The flux generates a moving force that makes the iron core 17 move towards the permanent magnet 16. The flux also magnetises the permanent magnet, allowing a permanent force that maintains the core in the closed position.

The mobile core 17 of the magnetic locking mechanism has been designed as light as possible in order to decrease the total mass. A shaft 18 transmits the resulting movement to the mobile contact 5.

The opening of the electrical contact 4, 5 can be achieved in two different ways. in an emergency case, e.g. at a short circuit, the contact can be opened by means of the actuator, e.g. of the Thomson type, as described below. In this case the forces generated by the actuator will release the locking mechanism 9 despite the fact that this mechanism is still magnetised. The contact 4, 5 can also be deliberately opened by demagnetising the locking mechanism.

The springs 13 shown in figures 2, 9a and 9b are keeping the contact in the open position after an opening by means of the actuator. As mentioned above the locking mechanism has not been demagnetised in that case and e.g. a mechanical shock could under circumstances re-close the contact. In the closed position the force generated by the magnet is much stronger than the force from the spring.

A damping arrangement (not shown) decelerates the moving masses after the opening of the contact. In this particular case a special plastic foam material positioned below the locking mechanism has been used which gives excellent

WO 00/54292

PCT/EP00/00789

absorption characteristics but of course many other types of shock absorbing arrangements could be envisaged alone or in combination, for example pneumatic or hydraulic types of damping.

- 5 The Thomson type actuator comprises a coil 7 in which is circulated a very strong current in pulse form (in one embodiment of the invention a current in the order of 15 kA, top value has been used). This current could for instance be generated by means of a battery of electrolytic capacitors controlled by a diode-thyristor arrangement. A disk 8 of copper or similar is positioned just below the
10 coil. By means of induction a counter current is generated in the disk when the coil is energised. The top value of this induced current could in the same embodiment reach a value of 80 kA. Due to these two currents a violent repulsion effect is created between the coil 7 and the mobile disk 8 which will move the disk and the mobile element 5 of the mechanical contact 1 actuated by
15 the shaft 10 fixed to the disk 8.

- In an especially advantageous embodiment of the invention a special type of coil is used. This coil comprises a number of superimposed coil modules 19 of planar type which could be manufactured by means of e.g. printed circuit
20 techniques. These modules are superimposed to give the appropriate characteristics for the coil. One advantage with this type of design of the actuating coil of the Thomson mechanism is that the coil 7 can be made extremely thin in the direction perpendicular to the surface of the disk 8 which means that the two opposite currents in the coil and the disk are brought close
25 together which considerably increases the repulsive effect between the coil 7 and the disk 8. This will of course decrease the reaction time of the mechanism.

- A first embodiment of a module for such a coil is shown in figures 3a and 3b. By means of known techniques a first layout of conducting material 20, e.g. copper,
30 is created on one side of a substrate 21. On the opposite side of the same substrate a second layout '20' is created. Figure 3a shows one side of the

module and figure 3b the other side. The conductor on each side of the substrate is communicating to the conductor on the other side by means of an electrical connection through the substrate. Such an electrical connection could e.g. have the form of the metallized walls of a through hole 22. If thus e.g. the hole 23 is considered to be the input to the module the current will flow via the conducting material 20' to the hole 22 which conducts to the other side of the substrate. The current will then follow the conductor on the other side to the output 24. A number of such modules could be superimposed and clamped together to create a flat and very compact coil. In this embodiment successive modules have to be separated by means of an isolation element as illustrated in figure 3c. The holes 23, 24 and 22 can all three conduct current between the two sides of the substrate via the metallized wall in the respective hole.

It is evident that when stacking such modules and isolation elements the modules will be electrically connected in parallel. A suitable number of modules are put together to give the desired characteristic of the coil.

The skin effect which has to be considered in high frequency and pulse mode will create much less problems than in the case of an ordinary coil which means that the conductor section of the coil according to the invention will be more efficiently used. In a particular embodiment the total copper section is divided in about ten very thin slices due to the planar design of the coil. In such a case, the total copper section will be carrying the current.

Figure 4a - 4d show different views of two coil modules of planar type forming part of a second embodiment of a coil which e.g. can be used in the drive mechanism of the electromechanical part of a circuit breaker. Figure 4a and 4b and figure 4c and 4d show the opposite sides of two coil modules respectively. Thus, if we define figure 4a as the upper side of the first type of module then figure 4b is the lower side of the same module. Then figure 4d will be the upper side and figure 4c the lower side of the second type of module. The layout of the

WO 00/54292

PCT/EP00/00789

lower side of the first type of module, figure 4b, and the upper side of the second type of module, figure 4d, are mirrored versions of each other as can be seen. The same goes for the layout of the upper side of the first type of module, figure 4a, and the lower side of the second type of module, figure 4c. The advantage of this arrangement is that if you alternate the types of modules when the coil is put together there does not have to be any isolation in between the coil modules. Short circuit of the coil windings is impossible. Thus, for given electrical characteristics the coil can be made even thinner by means of this second embodiment of the invention.

In an area around the input and output terminals 26 and 27 respectively of a coil module a number of smaller through holes 26' and 27' respectively have been arranged. The metallized walls of these holes are contributing to the conductive section between the two sides of the module.

Claims




1. An electrical coil module of planar type preferably manufactured by means of printed circuit techniques on a generally flat substrate (21), characterised in that a first layout (20) of conducting material constituting a first electrical conductor having an input terminal (23), is arranged on one side of said substrate (21), a second layout (20') of conducting material constituting a second electrical conductor having an output terminal (24), is arranged on the opposite side of said substrate, said first and second conductors are connected by means an electrical connection (22) through the substrate (21), so that an electrical voltage connected between the input and output terminals of the coil module will drive a current from one terminal through the conductor on one side of the substrate via connection (22) through the substrate and the conductor on the other side of the substrate to the other terminal.
2. A pair of coil modules according to claim 1 defining a first and a second module, characterised in that one side of the first module is provided with a layout of conducting material which is a mirrored version of the layout of the conducting material of one side of the second module, the other side of the first module is provided with a layout of conducting material which is a mirrored version of the layout of the conducting material of the other side of the second module.
3. An electrical coil comprising at least two coil modules according to claim 1 or 2 characterised in that said modules are superimposed and clamped together to create a flat coil in which the respective coil modules are electrically connected in parallel.

WO 00/54292

PCT/EP00/00789

4. An electrical coil according to claim 3, characterised in that, said modules are separated by means of an isolation element.
5. An electrical coil according to claim 2 and 3, characterised in that, it comprises at least one pair of modules according to claim 2 said modules are superimposed without intermediate isolation element.
6. An actuation mechanism of the Thompson type comprising an energising coil (7) , a co-operating disk (8) and a shaft (10) transferring the movement of the disk (8) characterised in that said coil is of the type defined in any of the claims 3 to 5.
7. An electromechanical circuit breaker comprising an actuation mechanism of the Thompson type, a pair of fixed contact elements (4) and a moving contact element (5) characterised in that said actuation mechanism is of the type defined in claim 6.
8. An electromechanical circuit breaker according to claim 7 characterised in that said moving contact element (5) is arranged on a pivoting arm (11).
9. A hybrid circuit breaker comprising an electromechanical circuit breaker according to claim 7 or 8 and a static circuit breaker connected in parallel characterised in that said static circuit breaker comprises a diode bridge (D1-D4) connected in parallel over the mechanical contacts (4, 5) of the electromechanical circuit breaker the diagonal of which bridge is including at least one IGCT type thyristor (T1, T2) connected in parallel with a MOV (6).
10. A hybrid circuit breaker according to claim 9, characterised in that a second MOV (6') in series with a resistor (25) is connected in parallel with said MOV (6).

1/5.

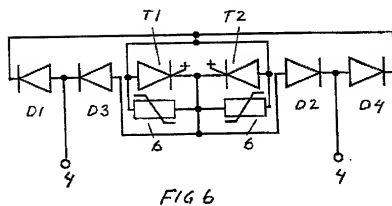




FIG 8




FIG 2

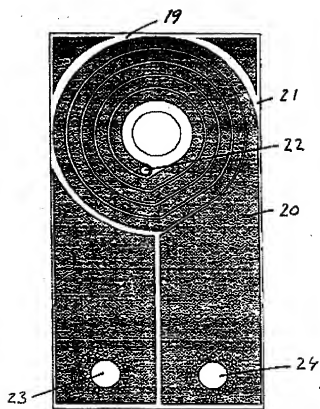


FIG 3a

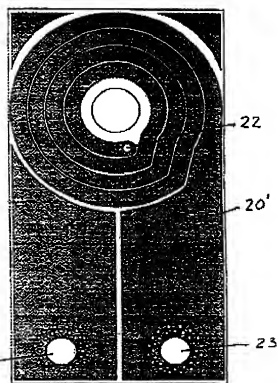


FIG 3b

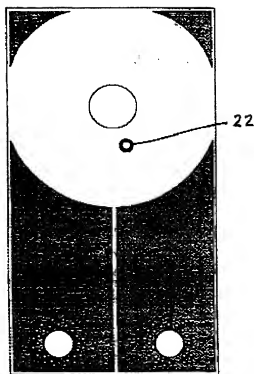


FIG 3c




FIG 7

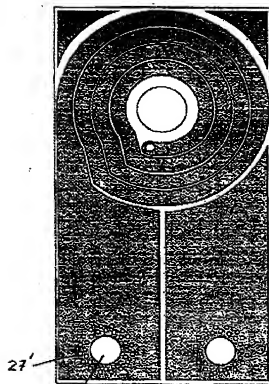


FIG 4a

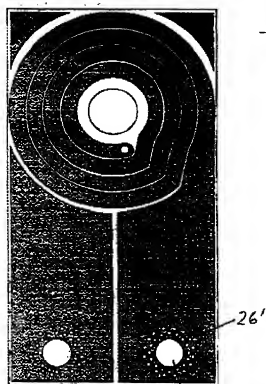


FIG 4c

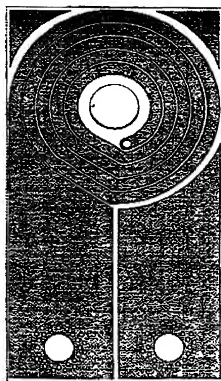


FIG 4b



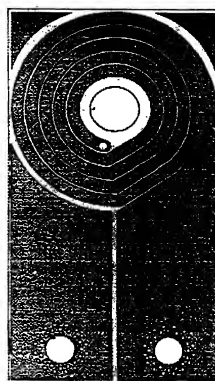


FIG 4d

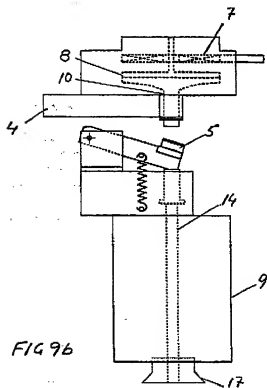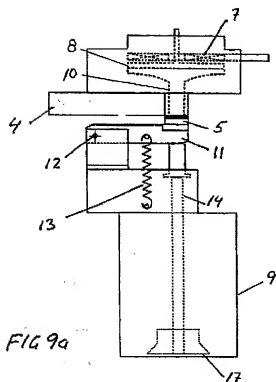

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

98EP01 US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

AN ELECTRICAL COIL MODULE, AN ELECTRICAL COIL COMPRISING SUCH MODULES, AN ACTUATION MECHANISM
INCLUDING SUCH A COIL AND A CIRCUIT BREAKER COMPRISING SUCH AN ACTUATION MECHANISM

the specification of which (check only one item below):

☒ is attached hereto.☐ was filed as United States application

Serial No. _____

on _____

and was amended

on _____ (if applicable).

☐ was filed as PCT international application

Number _____

on _____

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
SWEDEN	9900852-6	8 MARCH 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

ATTORNEY'S SECRET NAME
98EP01 US

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are filed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(e) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

FROM U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBER ASSIGNED (If any)		

POWER OF ATTORNEY: As a natural inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transmit all notices in the Patent and Trademark Office on my behalf. Last name and registration number(s): Robert J. Patch, Reg. No. 17,355; Andrew J. Patch, Reg. No. 32,925; Robert F. Hargest, Reg. No. 25,590; Benoit Castel, Reg. No. 35,041; Eric Jensen, Reg. No. 37,855; Thomas W. Perkins Reg. No. 33,027 and Roland E. Long, Jr., Reg. No. 41,949

Sand Corporation Inc.

YOUNG & THOMPSON
745 South 23rd Street
Arlington, Virginia 22202

CUSTOMER N^o 60466

Direct Telephone Calls to:
(name and telephone number)

Robert J. Patch 703/521-2297

201	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	INVENTOR'S ADDRESS	CITY	STATE OR REGION COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE COUNTRY
202	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	INVENTOR'S ADDRESS	CITY	STATE OR REGION COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE COUNTRY
203	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	INVENTOR'S ADDRESS	CITY	STATE OR REGION COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application for any patent issuing thereon.

SIGNATURE OF INVESTOR 201 <i>[Signature]</i>	SIGNATURE OF INVESTOR 202 <i>H. Duff</i>	SIGNATURE OF INVESTOR 203 <i>Pat. S.</i>
DATE	DATE	DATE